

REBLOC 120A_7.5

Technical Datasheet

Precast Concrete Vehicle Restraint System

Permanent System Bridge System Anchored




ASI B

REBLOC 120A_7.5

Technical data

Containment level	L4b / H4b
Working width	W2 (W _N ≤ 0.8 m)
Impact severity level	ASI B
Vehicle intrusion	VI6 (VI _N ≤ 2.1 m)
Installation	anchored in concrete (5 x adhesive anchors M20x400 per element on the front or rear side)
Application	single-sided double-sided
Minimum installation length	75 m (10 elements)
Initial/end anchorage	not necessary, optional available
Dimensions L x W x H in cm	750 x 67 x 120 cm
Weight/element	approx. 6030 kg
Curve radius	r ≥ 250 m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

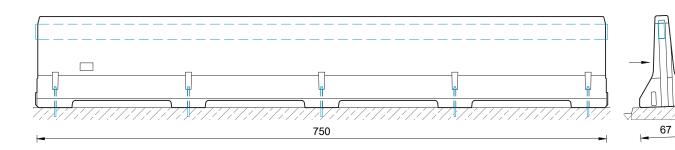

all dimensions in cm

120

